

- NOTES:
- 1) DIMENSIONS ARE IN INCHES (MM APPROX)
 - 2) DIMENSIONS SUBJECT TO CHANGE NOT TO BE USED FOR CONSTRUCTION UNLESS CERTIFIED
 - 3) GENERAL TOLERANCES APPLY. CONTACT FACTORY FOR DETAILS.
 - 4) SHELL IS DESIGNED TO ACCOMODATE BOTH 40" & 40.5" MEMBRANES.
 - 5) 3" SCH 40 PIPE AS PER ASME SA-479.
 - 6) NO ADAPTERS WILL BE SUPPLIED BY PENTAIR FOR DOW MEMBRANES. FOR DETAILS REFER PAGE 2.
 - 7) *3 EACH FURNISHED WITH LENGTH CODE 4,5,6,7&8.
 - 8) SHELL EXTERIOR COATED WITH WHITE, HIGH GLOSS POLYURETHANE PAINT.

Dash Length	L IN(MM)	S IN(MM)	Approx Weight LB(KG)
-1	77.9 (1980)	28X1 (711)	358 (162)
-2	118.4 (3008)	56X1 (1422)	444 (201)
-3	158.9 (4037)	80X1 (2032)	532 (241)
-4	199.4 (5066)	64X2 (1626)	620 (281)
-5	239.9 (6094)	78X2 (1981)	708 (320)
-6	280.4 (7123)	92X2 (2337)	796 (361)
-7	320.9 (8152)	106X2 (2692)	885 (401)
# -8	361.4 (9181)	120X2 (3048)	973 (441)

Dwg. Ref.	Qty. Per	Part Number	Part Name	Materials/Remarks
SHELL				
01	1		Shell Length	Filament wound epoxy/glass composite-Head locking grooves integrally wound in-place
HEAD				
02	2	96198	Bearing Plate	6061-T6 aluminium alloy - Hard Anodized
03	2	96225	Sealing Plate	Engineering Thermoplastic
04	2	96199	Feed/Conc Port	SS 316L
05	2	96217	Port Retainer Set	SS 316L
06	2	96200	Permeate Port	Engineering Thermoplastic
07	2	96220	Port Nut	Engineering Thermoplastic
08	2	96224	Head Seal	Ethylene Propylene - O-Ring
09	2	96223	Permeate Port Seal	Ethylene Propylene - O-Ring
10	2	96223	Feed Concentrate Port Seal	Ethylene Propylene - O-Ring
11	4	96215	Lifting Handle	SS 316
12	8	96403	Allen Head Screw	SS 316
HEAD INTERLOCK				
13	8	96219	Locking Segments	SS 316 OR CAST EQUIVALENT
14	16	96387	Allen Head Screw	SS 316
VESSEL SUPPORT				
15	2*	96216	Saddle	Engineering Thermoplastic
16	2*	94193	Strap Assy	304 Stainless Steel
ELEMENT INTERFACE				
17	2	96223	Adapter Seal	Ethylene Propylene - O-Ring
18	4	A/R	PWT Seal	Ethylene Propylene - O-Ring
19	2	A/R	Adapter	Engineering Thermoplastic
20	1	96221	Thrust Ring	Engineering Thermoplastic



DRAWN KR		CODELINE 160E30 MEMBRANE HOUSING		
CHECKED KR	DATE 23JUN10	DWG. NO. 99023	REV. G	
APPROVED SS	ECN 1875	SCALE NONE	SIZE A3	SHEET 1 OF 2

RATING:

DESIGN PRESSURE.....	300 PSI at 120°F (2.06 MPa @ 49°C)
MIN. OPERATING TEMP.....	20°F (-7°C)
FACTORY TEST PRESSURE.....	390 PSI (2.7 MPa)
BURST PRESSURE.....	1800 PSI (12.4 MPa)

INTENDED USE:

The CodeLine 160E30 Fiberglass RO Pressure Vessel is designed for continuous, long term use as a housing for reverse osmosis membrane elements to desalt typical brackish waters at pressures up to 300 psi. Any make of Sixteen-inch nominal diameter spiral-wound element is easily accommodated; the appropriate interfacing hardware for the element specified is furnished with the vessel.

The CodeLine 160E30 is designed in accordance with the engineering standards of the Boiler and Pressure Vessel Code of the American Society of Mechanical Engineers (ASME) Code.

The CodeLine 160E30 must be installed, operated and maintained in accordance with the listed precautions and good industrial practice to assure safe operation over a long service life.

The high performance Filament wound FRP shell must be allowed to expand under pressure; undue restraint at support points or piping connections can cause leaks to develop in the shell. The end closure, incorporating close fitting, interlocking metal components, must be kept dry and free of corrosion; deterioration can lead to catastrophic mechanical failure of the head.

Pentair Water will assist the purchaser in determining the suitability of this standard vessel for their specific operating conditions. The final determination however, including evaluation of the standard material of construction for compatibility with the specific corrosive environment, shall be the responsibility of the purchaser. Alternate materials with enhanced corrosion resistance are available on special order.

Specifications are subject to change without notice

PRECAUTIONS:

- DO...read, understand and follow all instructions; failure to take every precaution will void warranty and may result in vessel failure
- DO...mount the shell on horizontal members at span "S" using compliant vessel supports furnished; tighten hold down straps just snug
- DO...provide overpressure protection for vessel set at not more than 105% of design pressure
- DO...inspect end closures regularly; replace components that have deteriorated and correct causes of corrosion
- DO...Lubricate seals sparingly, using nonpetroleum based lubricants, i.e. Parker Super O-lube® Glycerin or suitable silicone based lubricants.
- DO NOT... make rigid piping connections to ports or clamp vessel in any way that resists growth of fiberglass shell under pressure; Δ DIA = 0.02 in. (0.5mm) and Δ L = 0.2 in. (5mm) for a length code -6 vessel
- DO NOT... hang piping manifolds from ports or use vessel in any way to support other components; branch connection piping may be simply supported between the header and port; maximum weight of branch piping; feed/concentrate – 16 lbs (7 kg); permeate – 8 lbs (4 kg)
- DO NOT... operate vessel at pressures and temperatures in excess of its rating
- DO NOT... operate vessel without permeate ports internally connected with a complete set of elements and interconnecting hardware
- DO NOT... operate vessel with permeate pressure in excess of 125 psi at 120°F (0.9 MPa @ 49°C)
- DO NOT... overtighten the connection to the permeate port (hand-tighten plus one-quarter turn, check for leaks)
- DO NOT... tolerate leaks or allow end closures to be routinely wetted in any way
- DO NOT... pressurize vessel until double-checking to verify that the locking segment is completely inside the groove
- DO NOT... work on any component until first verifying that pressure is relieved from vessel
- DO NOT... operate at pH levels below 3 or above 10

ORDERING:

Using the chart below, please check the features you require and fax them with your purchase order to our customer service department for expedited processing. For optional materials and/or features not listed below, please consult factory for pricing and availability.

VESSEL LENGTH CODE

MODEL 160E30 -1 -2 -3 -4 -5 -6 -7 -8

Consult Sales manager for Eight Element housings.

CERTIFICATION REQUIRED

Standard, Certified by Pentair Water.

MEMBRANE BRAND AND MODEL –Please check one and fill in the required information.

Please supply adapters for the following membrane brand and specific model Brand _____ Model _____.


Membrane brand and model information is not currently available, but will be supplied to Pentair Water on or before the following date. ___ / ___ / ___

MATERIAL OPTIONS

- Standard – All materials as per drawing 99023 on the first page.
- Customer specified material of construction.
(Please consult the factory, as these options will affect pricing and vessel lead-time.)

PERMEATE PORT FOR 40.5" DOW MEMBRANES

- Use 96966 Perm port & 96965 Thrust Ring

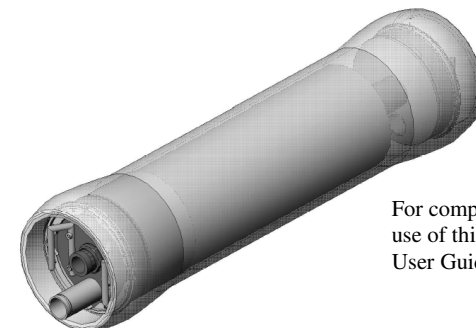

For complete information on the proper use of this vessel please refer to the 16" User Guide Bulletin No. 94347